


## Mechanical seals type J5

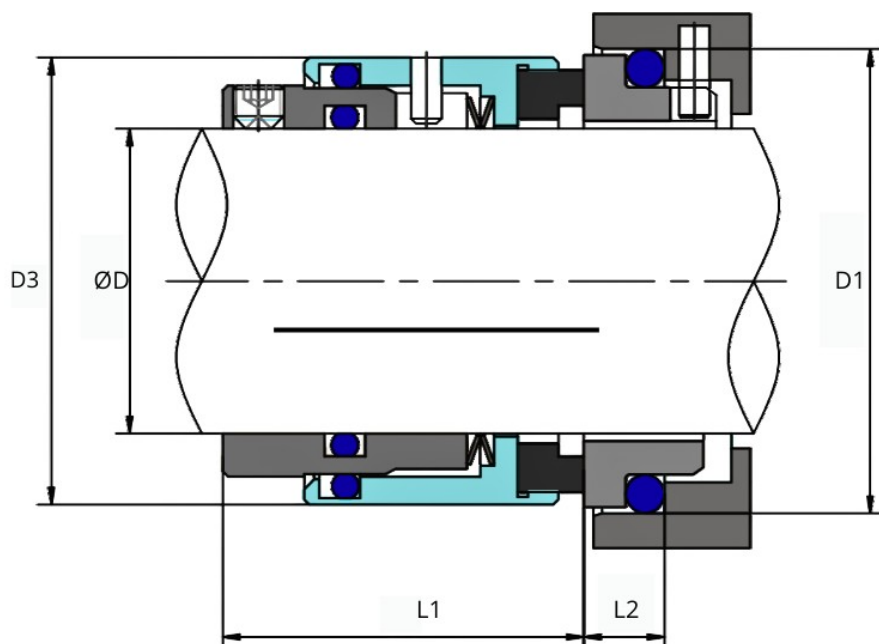

### J9 + S6 or S60 or S9

| ØD   | D3   | D1   | L1   | L2   |
|------|------|------|------|------|
| 20,0 | 34,0 | 35,0 | 26,0 | 11,5 |
| 25,0 | 39,0 | 40,0 | 29,0 | 11,5 |
| 30,0 | 44,0 | 45,0 | 31,0 | 11,5 |
| 35,0 | 49,0 | 50,0 | 31,0 | 11,5 |
| 40,0 | 56,0 | 58,0 | 31,0 | 14,0 |
| 48,0 | 64,0 | 66,0 | 31,0 | 14,0 |
| 55,0 | 71,0 | 75,0 | 32,5 | 15,0 |
| 60,0 | 80,0 | 80,0 | 37,5 | 15,0 |

### J91+S60

| ØD   | D3   | D1   | L1   | L2   |
|------|------|------|------|------|
| 48,0 | 64,0 | 66,0 | 34,5 | 9,0  |
| 60,0 | 80,0 | 80,0 | 39,5 | 11,0 |

### J92+L60

| ØD   | D3   | D1   | L1   | L2  |
|------|------|------|------|-----|
| 20,0 | 34,0 | 35,0 | 30,5 | 7,5 |
| 25,0 | 39,0 | 40,0 | 33,0 | 7,5 |
| 30,0 | 44,0 | 45,0 | 35,5 | 7,5 |
| 32,0 | 47,0 | 48,0 | 35,5 | 7,5 |
| 35,0 | 49,0 | 50,0 | 35,5 | 7,5 |
| 38,0 | 54,0 | 56,0 | 37,0 | 9   |
| 40,0 | 56,0 | 58,0 | 37,0 | 9   |
| 48,0 | 64,0 | 66,0 | 37,0 | 9   |
| 60,0 | 80,0 | 80,0 | 42,0 | 11  |



| dostępne pary materiałowe |                           |                           | MAX. WARUNKI PRACY                                                                                                                                                     |
|---------------------------|---------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Seal and seat assembly    | rotary face               | stationary face           | Zależą one od: ø wału, ciśnienia,<br>Prędkości, temperatury i<br>Uszczelnianego<br>Płynu i zastosowanego elastomeru.<br>p max 2,0 Mpa<br>t = max 200°C<br>v max 20 m/s |
| Face Reference term       | material code             | material code             |                                                                                                                                                                        |
| miękki                    | Carbon <b>C</b>           | Ceramic <b>V</b>          |                                                                                                                                                                        |
| miękki/twardy             | Carbon <b>C</b>           | SIC <b>S</b>              |                                                                                                                                                                        |
| twardy                    | SIC Carbide <b>S</b>      | SIC <b>S</b>              |                                                                                                                                                                        |
| Super twrdy               | Tungsten Carbide <b>H</b> | Tungsten Carbide <b>H</b> |                                                                                                                                                                        |